

# REFLEXBOND XL



## REINFORCED, REPOSITIONABLE ADHESIVE ALUMINUM TAPE




It is used to install most of our reflective membranes. The only adhesive approved by the Technical Advice **SKYTECH® PRO XL** 20/16-370\_V2

- + CAN BE CUT BY HAND
- + APPLICABLE IN WET CONDITIONS
- + VERY HIGH REFLECTIVITY (95%)
- + HIGH ADHESIVE STRENGTH

# REFLEXBOND XL

REINFORCED, REPOSITIONABLE  
ADHESIVE ALUMINUM TAPE

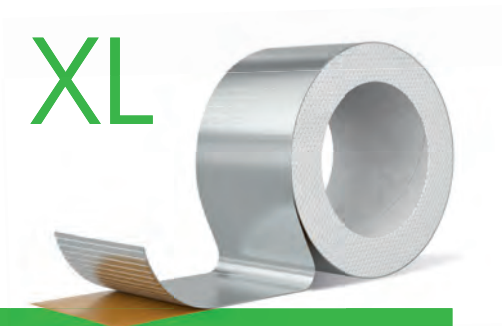

## TECHNICAL DATAS

Material	Protector made of siliconised paper, adhesive mass, reinforced aluminium film
Width	75 / 100 / 125mm
Length	25m
Temperature resistance	-40°C to +90°C
Application temperature	min. - 10°C
Emissivity/ Reflectivity	5% / 95%
Roll weight	0,6 / 0,8 / 1kg
Packaging	75 mm: 16 rolls/box / 100mm: 12 rolls/box / 125mm: 12 rolls/box

## BENEFITS

- Repositionable product before marouflage - Can be easily cut manually and without any tool	- UV resistant - Applicable in wet conditions	- Reinforced with glass fabric - Unique on the market
---	--	--

## INSTALLATION AND SUBSTRATES

MATERIALS	MEMBRANES
Concrete Dry wood Brick	Non-combustible and reflective rainscreens Standard roof membranes Vapour control layer Multilayer membranes Insulation overlaid with kraft or aluminium

## FIELD OF APPLICATION

Reinforced adhesive foil for reflective insulation and the treatment of singular points (chimney ducts, roof windows, valleys...)

## STORAGE

Keep away from cold and heat

Product ref.: 475 - 479 - 486



**TECHNOPÔLE  
SAINT-BRIEUC ARMOR**  
5, rue Sophie Germain  
22440 PLOUFRAGAN  
FRANCE  
T. +33 (0)2 96 78 24 22  
export@winco-tech.com  
[www.winco-tech.com](http://www.winco-tech.com)