


TRIDAT

Non-combustible protecting membrane.

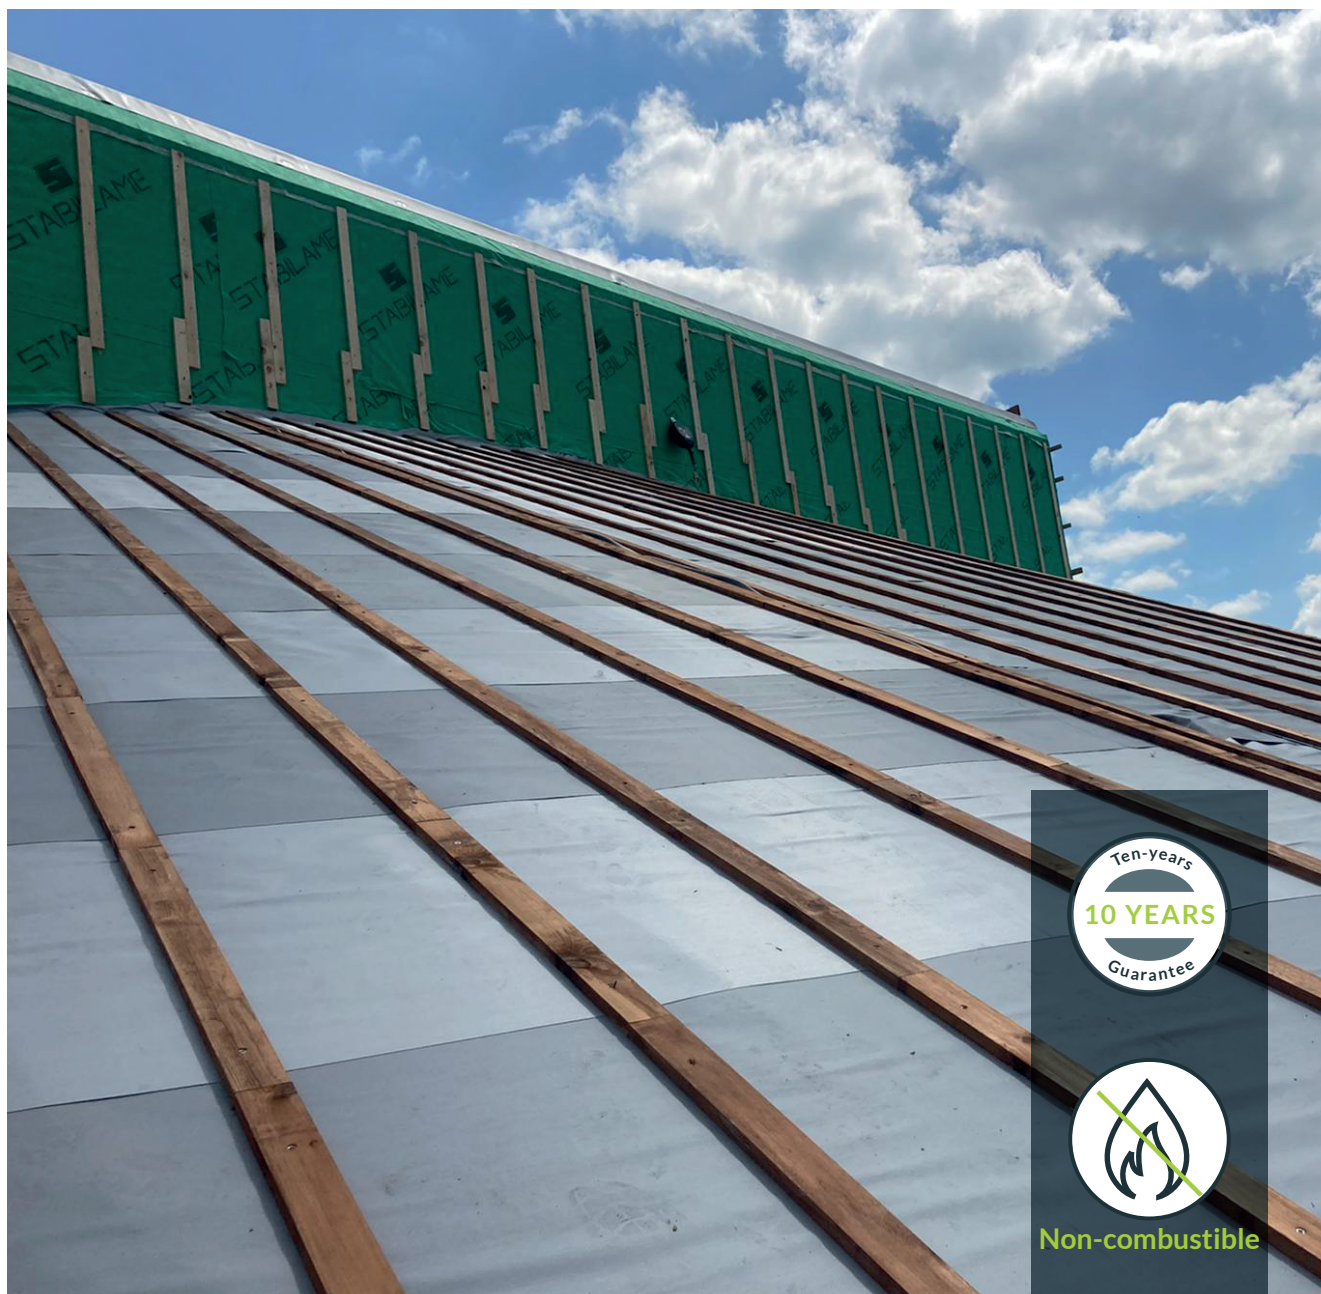

KEY STRENGTHS

■ Non-combustible A2-s1, d0

■ Easy to cut and handle

TRIDAT

Non-combustible protecting membrane.



GENERAL CHARACTERISTICS :

Material	Glass fibre fabric
Thickness	0,41 mm
Mass per unit area	460 g/m ²

ESSENTIAL CHARACTERISTICS :

Reaction to fire	A2-s1, d0	EN 13501-1
Temperature range	-36°C to 180°C	

MECHANICAL CHARACTERISTICS :

TENSILE STRENGTH :

Longitudinal sense (L)	3 900 N/50mm ± 500	EN 12311-2
Transversal sense (T)	1 900 N/50mm ± 500	EN 12311-2

PACKAGING CHARACTERISTICS :

Width	1 m
Length	50 m
Total m ²	50 m ²
Weight	23 kg
Packaging	25 rolls/pallet (1 250 m ²)